

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number  
WO 2004/070752 A3

(51) International Patent Classification<sup>7</sup>: H02H 3/00

(21) International Application Number:  
PCT/US2004/002596

(22) International Filing Date: 30 January 2004 (30.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/444,469 3 February 2003 (03.02.2003) US  
10/692,056 22 October 2003 (22.10.2003) US

(71) Applicant (for all designated States except US): LEVITON MANUFACTURING CO., INC. [US/US]; 59-25 Little Neck Parkway, Little Neck, NY 11362 (US).

(72) Inventors: GERMAIN, Frantz; 142-10 243 Street, Rosedale, NY 11422 (US). HERZFIELD, David; 8 Woodhollow Lane, Huntington, NY 11743 (US). CALIXTO,

Armando; 79-14 261 Street, Floral Park, NY 11004 (US). CHAN, David; 83-34 250th Street, Bellerose, NY 11426 (US). STEWART, Stephen; 4710-2 Hillcrest Drive, Berrien Springs, MI 49103 (US). STEWART, Stephen; 4710-2 Hillcrest Drive, Berrien Springs, MI 49103 (US).


(74) Agents: SUTTON, Paul, J. et al.; Greenberg Traurig, LLP, 885 Third Avenue, New York, NY 10022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: CIRCUIT INTERRUPTING DEVICE AND SYSTEM UTILIZING ELECTROMECHANICAL RESET

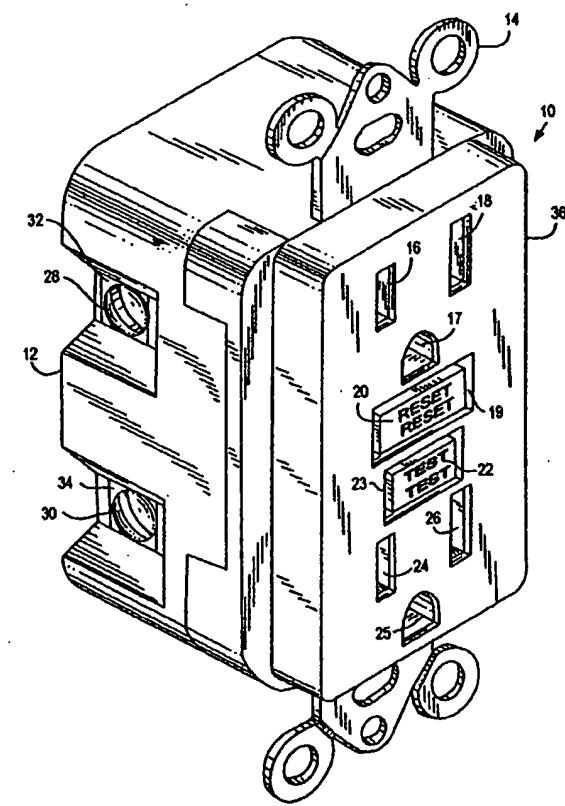

(57) Abstract: A GFCI device (10) which has reverse wiring protection is provided where no power is present at the face terminals (16, 24) even when the device is reverse wired. The device also has a reset lockout feature that prevents it from being reset after having been tripped if the circuit interrupting portion of the device is non-operational.

WO 2004/070752 A3